


UKW 4-1-Z Forced air cooling wells: remote cooling

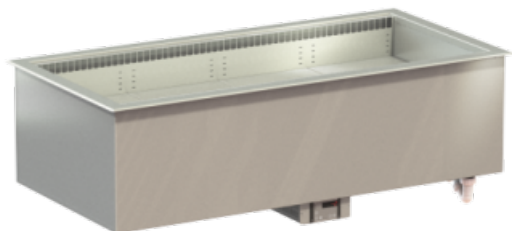

€4,838.00

plus VAT

Item no.: EU253820



Completely made of stainless steel
all visible sides polished
Inner well welded tight in a hygienic design
Polyurethane rigid foam insulation (compression-moulded)
coated fin coil evaporator with circulating air – can be folded up for cleaning
electronic controller with digital temperature display
fully-automatic defrosting
deep-drawn condensate drain HD 30

Typing and database errors reserved.

IDEAL Kältetechnik GmbH

📍 In der Schörihub 28, 4810 Gmunden, AT

☎ +43 7612 660 61

✉ office@ideal-ake.at

AKE Ausseer Kälte- und Edelstahltechnik GmbH

📍 Pichl 66, 8984 Bad Mitterndorf, AT

☎ +43 3624 211 00

✉ office@ake.at

Version:	Z
Power input cold:	14 Watt
Installation Opening width:	1385
Installation Opening depth:	665
Inner well width:	1305
Inner well depth:	535
Inner well height:	175
Net content liters:	126
Annual energy consumption kWh:	1573,1500
Energy efficiency index:	70,1532
Voltage volt:	230
Frequency Hz:	50
Refrigeration :	R134a
Cooling capacity:	590 Watt at VT -10°C
Energy efficiency class :	F
Temperature class:	M2 -1 +7
Energy consumption kWh 24h:	4,3100
Refrigerated display case Climate class:	3
Standard:	EN ISO 23953-2

Typing and database errors reserved.

IDEAL Kältetechnik GmbH

📍 In der Schörihub 28, 4810 Gmunden, AT
 ☎ +43 7612 660 61
 ✉ office@ideal-ake.at

AKE Ausseer Kälte- und Edelstahltechnik GmbH

📍 Pichl 66, 8984 Bad Mitterndorf, AT
 ☎ +43 3624 211 00
 ✉ office@ake.at