


KGU GS-152-53-Z Combo display,cold - not refrigerated: remote cooling

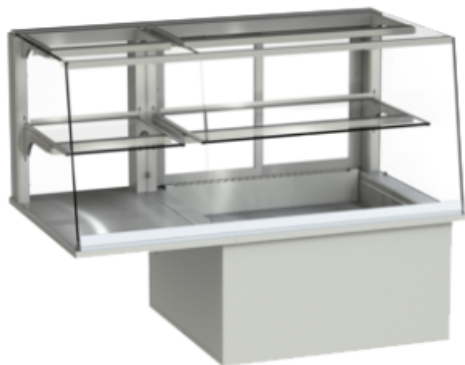

€7,122.00

plus VAT

Item no.: EU512356

SLANTED Entirely made of stainless steel, 24 Volt fan. Service side: Refr. part with sliding, insulated glass doors (left), ambient part open (right); Customer side: panorama glass pane made of safety glass; 1 shelf per part made of glass adjustable in height, internal lighting on each level, incl. deep well with base trays adjustable in height, incl. control unit with digital temperature display. Expansion valve R 134a mounted, outlets for pipes on the bottom. Drain necessary. Temperature: Air 5°C / Product M2 / 3 Refrigerant: R 134a Refrigerating capacity: 420 Watt at ET -8°C Dim.: (WxDxH) 1525x695x530/900 mm

Modell:	inclined
Width:	1525
Depth:	695
Height:	900
Version:	Z
Power input cold:	520 Watt
Installation Opening width:	1065
Installation Opening depth:	670
Voltage volt:	230
Frequency Hz:	50
Refrigeration :	R134a
Cooling capacity:	110 Watt at VT -8°C
Energy consumption kWh 24h:	6,8400

Typing and database errors reserved.

IDEAL Kältetechnik GmbH

📍 In der Schörihub 28, 4810 Gmunden, AT
 ☎ +43 7612 660 61
 ✉ office@ideal-ake.at

AKE Ausseer Kälte- und Edelstahltechnik GmbH

📍 Pichl 66, 8984 Bad Mitterndorf, AT
 ☎ +43 3624 211 00
 ✉ office@ake.at