


Tropical Flaps 60-70-Z Display case w. flip-up doors - remote refr.

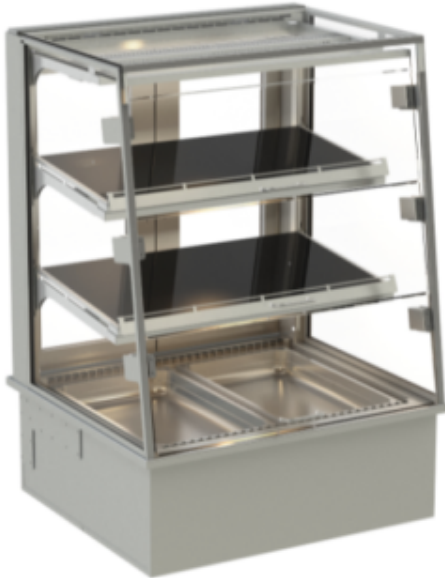

€8,525.00

plus VAT

Item no.: EU537635



- Optimally matched self-service display case with temperature range 3M1 (air temperature +2 °C and product temperature M1: -1 °C to +5 °C)
- Display case that can be used in a variety of ways for the presentation of cold snacks on multiple levels
- No condensate formation on the soft-close removal flaps thanks to the integrated window ventilation (double air-curtain)
- Air-curtain cooling for the best-possible energy efficiency in ongoing operation, temperature control by means of a control unit with temperature display
- Inclined positioning of the intermediate shelf for first-class view of the product assortment
- Soft-close removal flaps made of tempered safety glass with integrated soft-close system for convenient food removal; optimum spit and cough protection and the best energy efficiency
- Hinged door on operator side made of insulated glass with two-way mirror
- Side windows made of insulating glass
- Transparent construction
- Long-lasting LED lighting on all levels
- Incl. price tag holder
- Easiest cleaning and perfect hygiene
- Remote refrigeration: expansion valve R134a, connection lines lead out downwards, drain required on-site for remote refrigeration

Product temperature: -1°C to +5°C (Class M1)

Typing and database errors reserved.

IDEAL Kältetechnik GmbH

📍 In der Schörihub 28, 4810 Gmunden, AT

☎ +43 7612 660 61

✉ office@ideal-ake.at

AKE Ausseer Kälte- und Edelstahltechnik GmbH

📍 Pichl 66, 8984 Bad Mitterndorf, AT

☎ +43 3624 211 00

✉ office@ake.at

Air temperature: +2°C

Connected load: 49 W – 230V/50Hz

Refrigeration capac.: 420 W at ET -8°C

Dimensions (WxDxH): 600 x710 x 700/1075 mm

| | |
|--|---------------------|
| Width: | 600 |
| Depth: | 710 |
| Height: | 960 |
| Version: | Z |
| Power input cold: | 42 Watt |
| Installation Opening width: | 580 |
| Installation Opening depth: | 670 |
| Annual energy consumption kWh: | 1492,8500 |
| Energy efficiency index: | 23,5169 |
| Voltage volt: | 230 |
| Frequency Hz: | 50 |
| Refrigeration : | R134a |
| Cooling capacity: | 520 Watt at VT -8°C |
| Energy efficiency class : | C |
| Temperature class: | M1 -1 +5 |
| Energy consumption kWh 24h: | 4,0900 |
| Refrigerated display case Climate class: | 3 |
| Standard: | EN ISO 23953-2 |

Typing and database errors reserved.

IDEAL Kältetechnik GmbH

📍 In der Schörihub 28, 4810 Gmunden, AT

☎ +43 7612 660 61

✉ office@ideal-ake.at

AKE Ausseer Kälte- und Edelstahltechnik GmbH

📍 Pichl 66, 8984 Bad Mitterndorf, AT

☎ +43 3624 211 00

✉ office@ake.at