



SELF-CONTAINED (remote refrigerated = w/o condensing unit)


(operator side)

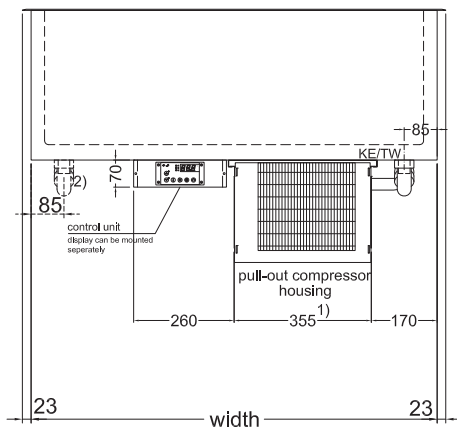


(side elevation)

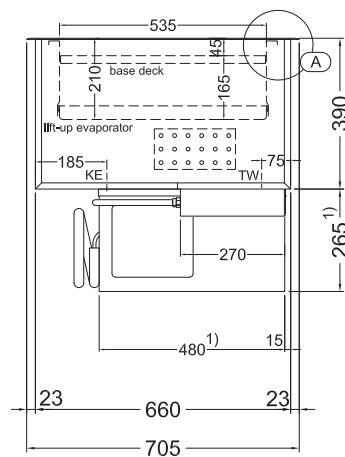


As an option:
condensate evaporation
by means of hot gas




As an option:
Electrical condensate
evaporation tray (1000 W)
(for remote refrigerated models)



TW = Drain DNØ30
KE = Cooling/Electric



Detail A:



Detail A: built under granite

- 1) "UKW 1/1-E": dimensions of compressor housing are (WxDxH) 355 x 480 x 318 mm
"UKW 5/1-E": dimensions of compressor housing are (WxDxH) 370 x 520 x 310 mm
2) "UKW 6/1" includes an additional drain on the left side end

ACCESSORIES AND OPTIONS

Support bars for GN trays (UKW), lengthwise bar, sideways, 530 mm		253 668	43,-
Support bars for GN trays (UKW), Crossbar 325 mm		253 681	33,-
Support bars for GN trays (UKW), lengthwise bar, middle, 530 mm		253 674	43,-
Version with electronic expansion valve, for remote refrigerated models			on request
Electrical condensate evaporation tray, 1000 Watt		190 220	809,-
Without base deck GN for UKW	Price reduction	253 692	-59,-
Without control unit for remote refrigerated models	Price reduction	253 657	-292,-
Condensate tray		253 655	103,-