


Tropical Flaps 60-70-E Display case w. flip-up doors - self cont.

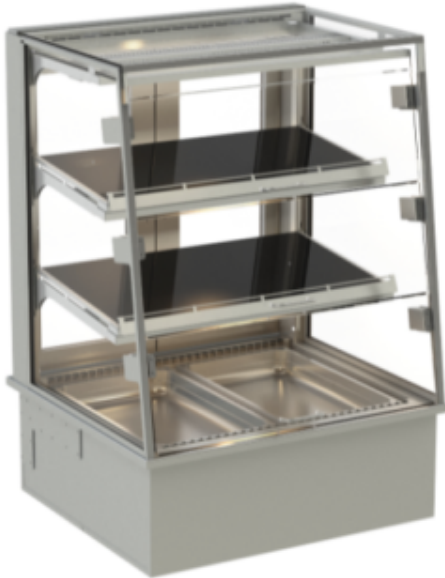

9 878,00 €

hors TVA

Réf. d'article : EU537630



- Optimally matched self-service display case with temperature range 3M1 (air temperature +2 °C and product temperature M1: -1 °C to +5 °C)
- Display case that can be used in a variety of ways for the presentation of cold snacks on multiple levels
- No condensate formation on the soft-close removal flaps thanks to the integrated window ventilation (double air-curtain)
- Air-curtain cooling for the best-possible energy efficiency in ongoing operation, temperature control by means of a control unit with temperature display
- Inclined positioning of the intermediate shelf for first-class view of the product assortment
- Soft-close removal flaps made of tempered safety glass with integrated soft-close system for convenient food removal; optimum spit and cough protection and the best energy efficiency
- Hinged door on operator side made of insulated glass with two-way mirror
- Side windows made of insulating glass
- Transparent construction
- Long-lasting LED lighting on all levels
- Incl. price tag holder
- Easiest cleaning and perfect hygiene
- Self-contained: With refrigerant R134a; fully automatic condensate evaporation for self-contained model

Product temperature: -1°C to +5°C (Class M1)

Erreurs, changements et omissions réservés.

IDEAL Kältetechnik GmbH

📍 In der Schörihub 28, 4810 Gmunden, AT

☎ +43 7612 660 61

✉ office@ideal-ake.at

AKE Ausseer Kälte- und Edelstahltechnik GmbH

📍 Pichl 66, 8984 Bad Mitterndorf, AT

☎ +43 3624 211 00

✉ office@ake.at

Air temperature: +2°C

Connected load: 449 W – 230V/50Hz

Dimensions (WxDxH): 600 x710 x 700/1335 mm

Largeur:	600
Profondeur:	710
Hauteur:	1335
Version:	E
Puissance absorbée froide:	342 Watt
Ouverture de montage largeur:	580
Ouverture de montage profondeur:	670
Consommation annuelle d'énergie kWh:	1193,5500
Indice d'efficacité énergétique:	17,1185
Voltage Volt:	230
Fréquence Hz:	50
Fluide frigorigène:	R134a
Capacité frigorifique:	520 Watt à TE -8°C
Classe d'efficacité énergétique:	B
Classe de température:	M1 -1 +5
Consommation d'énergie kWh 24h:	3,2700
Classe climatique armoires réfrigérées:	3
Norme:	EN ISO 23953-2

Erreurs, changements et omissions réservés.

IDEAL Kältetechnik GmbH

📍 In der Schörihub 28, 4810 Gmunden, AT

☎ +43 7612 660 61

✉ office@ideal-ake.at

AKE Ausseer Kälte- und Edelstahltechnik GmbH

📍 Pichl 66, 8984 Bad Mitterndorf, AT

☎ +43 3624 211 00

✉ office@ake.at