


Tropical Switch Flaps 60-70-E Switchable disp. case w. flip-up d. - self cont.

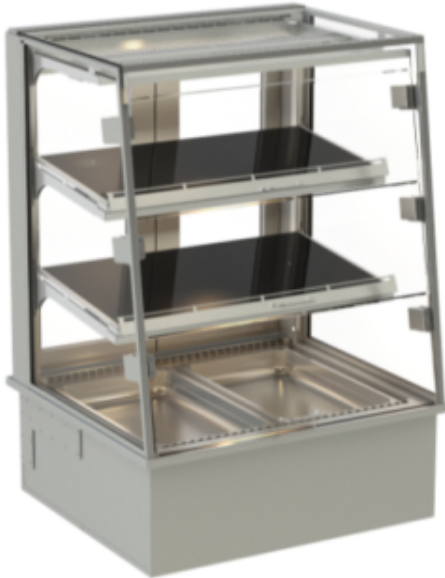

12 381,00 €

hors TVA

Réf. d'article : EU539630



- Self-service display case with switch function for quick switchover possibility between cold and hot operation – optimally matched to 24/7 operation
- Display case that can be used in a variety of ways for the presentation of cold or hot snacks on multiple levels
- No condensate formation on the soft-close removal flaps thanks to the integrated window ventilation (double air-curtain)
- Heating mode: With infrared supporting heat and primary heat below the black glass presentation area – settable by means of pictogram control
- Cooling mode: Air-curtain cooled display case for the best-possible energy efficiency in ongoing operation, temperature control by means of a control unit with temperature display,
- Inclined positioning of the intermediate shelf made of black glass for first-class view of the product assortment and optimum temperature transmission to the products
- Soft-close removal flaps made of tempered safety glass with integrated soft-close system for convenient food removal; optimum spit and cough protection and the best energy efficiency
- Hinged door on operator side made of insulated glass with two-way mirror
- Side windows made of insulating glass
- Transparent construction
- Long-lasting LED lighting per level
- Easiest cleaning and perfect hygiene
- Self-contained: With refrigerant R134a; fully automatic condensate evaporation for self-contained model;

Erreurs, changements et omissions réservés.

IDEAL Kältetechnik GmbH

📍 In der Schörihub 28, 4810 Gmunden, AT
☎ +43 7612 660 61
✉ office@ideal-ake.at

AKE Ausseer Kälte- und Edelstahltechnik GmbH

📍 Pichl 66, 8984 Bad Mitterndorf, AT
☎ +43 3624 211 00
✉ office@ake.at

Temperatures COLD:

Product temperature: -1°C to +5°C (Class M1)

Air temperature: +2°C

Temperatures HOT:

Product temperature: > +65°C

Connected load: 1410 W - 230V/50Hz

Dimensions (WxDxH): 600 x710 x 700/1335 mm

Largeur:	600
Profondeur:	710
Hauteur:	1335
Version:	E
Ouverture de montage largeur:	580
Ouverture de montage profondeur:	670
Puissance absorbée chaude:	1,41 kW
Consommation annuelle d'énergie kWh:	1193,5500
Indice d'efficacité énergétique:	17,1185
Voltage Volt:	230
Fréquence Hz:	50
Fluide frigorigène:	R134a
Capacité frigorifique:	520 Watt à TE -8°C
Classe d'efficacité énergétique:	B
Classe de température:	M1 -1 +5
Consommation d'énergie kWh 24h:	3,2700
Classe climatique armoires réfrigérées:	3
Norme:	EN ISO 23953-2

Erreurs, changements et omissions réservés.

IDEAL Kältetechnik GmbH

📍 In der Schörihub 28, 4810 Gmunden, AT

☎ +43 7612 660 61

✉ office@ideal-ake.at

AKE Ausseer Kälte- und Edelstahltechnik GmbH

📍 Pichl 66, 8984 Bad Mitterndorf, AT

☎ +43 3624 211 00

✉ office@ake.at