


Tropical Flaps 60-70-Z Display case w. flip-up doors - remote refr.

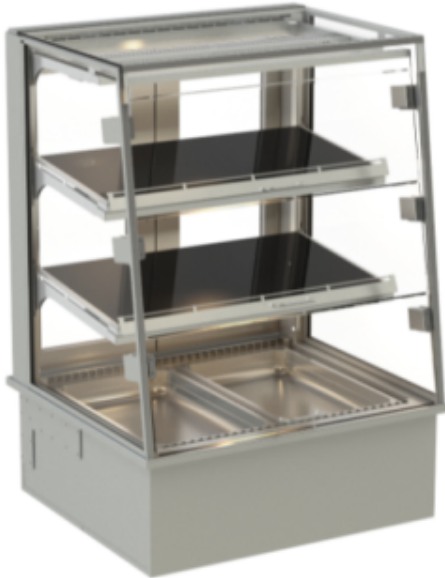

€ 8.525,00

excl. btw

Artikelnr.: EU537635



- Optimally matched self-service display case with temperature range 3M1 (air temperature +2 °C and product temperature M1: -1 °C to +5 °C)
- Display case that can be used in a variety of ways for the presentation of cold snacks on multiple levels
- No condensate formation on the soft-close removal flaps thanks to the integrated window ventilation (double air-curtain)
- Air-curtain cooling for the best-possible energy efficiency in ongoing operation, temperature control by means of a control unit with temperature display
- Inclined positioning of the intermediate shelf for first-class view of the product assortment
- Soft-close removal flaps made of tempered safety glass with integrated soft-close system for convenient food removal; optimum spit and cough protection and the best energy efficiency
- Hinged door on operator side made of insulated glass with two-way mirror
- Side windows made of insulating glass
- Transparent construction
- Long-lasting LED lighting on all levels
- Incl. price tag holder
- Easiest cleaning and perfect hygiene
- Remote refrigeration: expansion valve R134a, connection lines lead out downwards, drain required on-site for remote refrigeration

Product temperature: -1°C to +5°C (Class M1)

Fouten en systeemfouten gereserveerd.

IDEAL Kältetechnik GmbH

📍 In der Schörihub 28, 4810 Gmunden, AT
☎ +43 7612 660 61
✉ office@ideal-ake.at

AKE Ausseer Kälte- und Edelstahltechnik GmbH

📍 Pichl 66, 8984 Bad Mitterndorf, AT
☎ +43 3624 211 00
✉ office@ake.at

Air temperature: +2°C

Connected load: 49 W – 230V/50Hz

Refrigeration capac.: 420 W at ET -8°C

Dimensions (WxDxH): 600 x710 x 700/1075 mm

Breedte:	600
Diepte:	710
Hoogte:	960
Versie:	Z
Opgenomen vermogen koud:	42 Watt
Inbouwopening breedte:	580
Inbouwopening diepte:	670
Jaarlijks energieverbruik kWh:	1492,8500
Energie-efficiëntie-index:	23,5169
Spanning Volt:	230
Frequentie Hz:	50
Koelmiddel:	R134a
Koelvermogen:	520 Watt bij VT -8°C
Energie-efficiëntieklasse:	C
Temperatuurklasse:	M1 -1 +5
Energieverbruik kWh 24u:	4,0900
Klimaatklasse Koelkasten:	3
Norm:	EN ISO 23953-2

Fouten en systeemfouten gereserveerd.

IDEAL Kältetechnik GmbH

📍 In der Schörihub 28, 4810 Gmunden, AT

☎ +43 7612 660 61

✉ office@ideal-ake.at

AKE Ausseer Kälte- und Edelstahltechnik GmbH

📍 Pichl 66, 8984 Bad Mitterndorf, AT

☎ +43 3624 211 00

✉ office@ake.at