


## Tropical Flaps 60-87-Z Display case w. flip-up doors - remote refr.

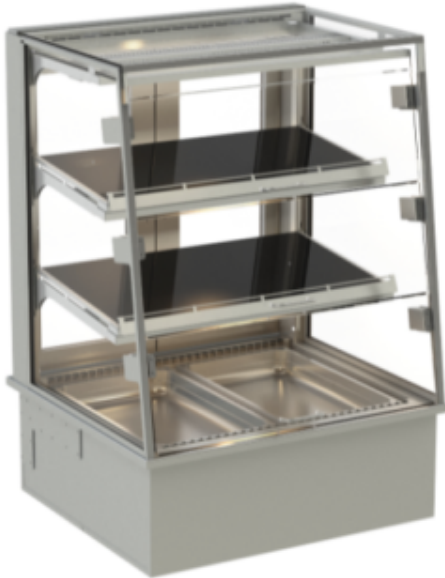

**€ 9.534,00**

excl. btw

**Artikelnr.:** EU537935

- Optimally matched self-service display case with temperature range 3M1 (air temperature +2 °C and product temperature M1: -1 °C to +5 °C)
- Display case that can be used in a variety of ways for the presentation of cold snacks on multiple levels
- No condensate formation on the soft-close removal flaps thanks to the integrated window ventilation (double air-curtain)
- Air-curtain cooling for the best-possible energy efficiency in ongoing operation, temperature control by means of a control unit with temperature display
- Inclined positioning of the intermediate shelf for first-class view of the product assortment
- Soft-close removal flaps made of tempered safety glass with integrated soft-close system for convenient food removal; optimum spit and cough protection and the best energy efficiency
- Hinged door on operator side made of insulated glass with two-way mirror
- Side windows made of insulating glass
- Transparent construction
- Long-lasting LED lighting on all levels
- Incl. price tag holder
- Easiest cleaning and perfect hygiene
- Remote refrigeration: expansion valve R134a, connection lines lead out downwards, drain required on-site for remote refrigeration

Product temperature: -1°C to +5°C (Class M1)

Fouten en systeemfouten gereserveerd.

**IDEAL Kältetechnik GmbH**

📍 In der Schörihub 28, 4810 Gmunden, AT

☎ +43 7612 660 61

✉ office@ideal-ake.at

**AKE Ausseer Kälte- und Edelstahltechnik GmbH**

📍 Pichl 66, 8984 Bad Mitterndorf, AT

☎ +43 3624 211 00

✉ office@ake.at

Air temperature: +2°C

Connected load: 52 W – 230V/50Hz

Refrigeration capac.: 480 W at ET -8°C

Dimensions (WxDxH): 600 x710 x 870/1330 mm

|                          |                      |
|--------------------------|----------------------|
| Breedte:                 | 600                  |
| Diepte:                  | 710                  |
| Hoogte:                  | 1130                 |
| Versie:                  | Z                    |
| Opgenomen vermogen koud: | 74 Watt              |
| Inbouwopening breedte:   | 780                  |
| Inbouwopening diepte:    | 670                  |
| Spanning Volt:           | 230                  |
| Frequentie Hz:           | 50                   |
| Koelmiddel:              | R134a                |
| Koelvermogen:            | 520 Watt bij VT -8°C |

Fouten en systeemfouten gereserveerd.

**IDEAL Kältetechnik GmbH**

📍 In der Schörihub 28, 4810 Gmunden, AT

☎ +43 7612 660 61

✉ office@ideal-ake.at

**AKE Ausseer Kälte- und Edelstahltechnik GmbH**

📍 Pichl 66, 8984 Bad Mitterndorf, AT

☎ +43 3624 211 00

✉ office@ake.at