Salatbar GN 6-1-Z Single Built-in Refrigerated Display Case: remote cooling

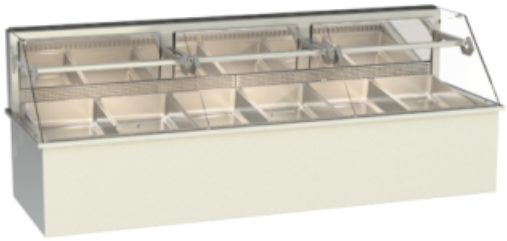

€10,315.00

plus VAT

Item no.: EU386016

Glass enclosure: oblique design with normal glazing
Completely made of stainless steel, all visible sides polished
Inner well welded tight in a hygienic design
Polyurethane rigid foam insulation (compression-moulded)
Coated fin coil evaporator with circulating air – can be folded up with pressure-relief for cleaning
Speed-controlled low-voltage fan
Electronic controller with digital temperature display
Fully-automatic defrosting and condensate evaporation
Deep-drawn condensate drain HD 30
Interior lighting on the cover

Typing and database errors reserved.

IDEAL Kältetechnik GmbH
In der Schörihub 28, 4810 Gmunden, AT
+43 7612 660 61
office@ideal-ake.at

AKE Ausseer Kälte- und Edelstahltechnik GmbH
Pichl 66, 8984 Bad Mitterndorf, AT
+43 3624 211 00
office@ake.at

Width:	2065
Depth:	695
Height:	744
Version:	Z
Power input cold:	95 Watt
Installation Opening width:	2040
Installation Opening depth:	670
Inner well width:	1955
Inner well depth:	535
Inner well height:	163
Net content liters:	157
Annual energy consumption kWh:	1494,6750
Energy efficiency index:	53,6908
Voltage volt:	230
Frequency Hz:	50
Refrigeration :	R134a
Cooling capacity:	860 Watt at VT -10°C
Energy efficiency class :	E
Temperature class:	M2 -1 +7
Energy consumption kWh 24h:	4,0950
Refrigerated display case Climate class:	3
Standard:	EN ISO 23953-2

Typing and database errors reserved.

IDEAL Kältetechnik GmbH
In der Schörihub 28, 4810 Gmunden, AT
+43 7612 660 61
office@ideal-ake.at

AKE Ausseer Kälte- und Edelstahltechnik GmbH
Pichl 66, 8984 Bad Mitterndorf, AT
+43 3624 211 00
office@ake.at